



ASUS Eee PC 900HD Key Board Replacement

When your keyboard has gotten dirty or not working correctly, a replacement might come in hand. For this replacement you will need a few tools and be prepared to work gently.

Written By: Kendall Marie Mehlhorn



INTRODUCTION

This guide will teach you how to properly take apart your Asus to replace the keyboard.

TOOLS:

- [Spudger](#) (1)
 - [Tweezers](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Key Board




- Open the laptop so that you can see the keyboard.
- Unlock the three keyboard tabs by pushing down on the silver tabs with a Spudger.

Step 2




- With the plastic opening tool, you will carefully lift up the keyboard.

Step 3

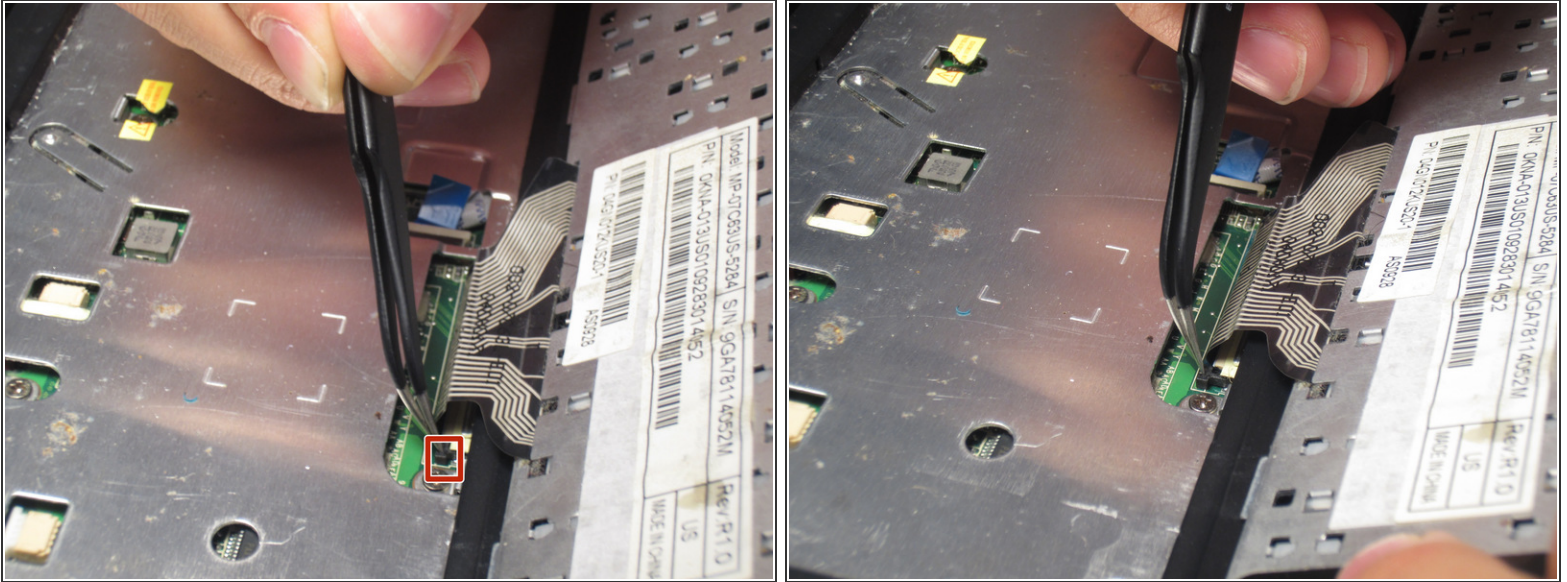

- Using a pair of tweezers, disconnect the cable at the bottom of the keyboard by flipping the two lock switches up on both sides of the cable.

Step 4

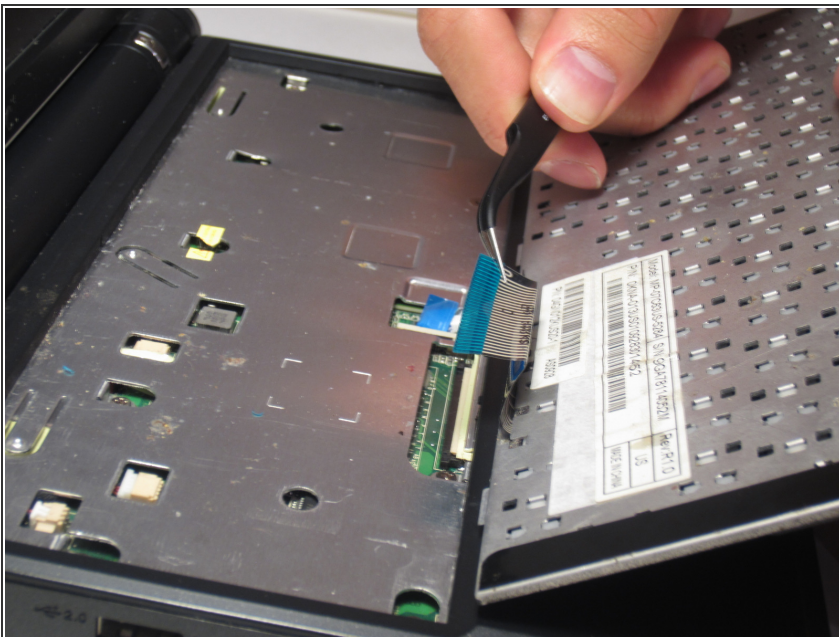

⚠ Carefully pull the cable out.

- You are now able to disconnect the keyboard from its origin.

To reassemble your device, follow these instructions in reverse order.

